

# Marino\WARE® Product Submittal Data


**PRODUCT NAME:** Jamb Track

**MARINO\WARE PART #** 400JT20

**PROPERTIES:**

<b>A. (in)</b>	4	<b>Yield Strength Fy (ksi)</b>	40
<b>B. (in)</b>	3	<b>Mils</b>	33
<b>C. (in)</b>	1	<b>Gauge</b>	20 STR
<b>Available Finish</b>	G40, G60	<b>Design Thickness (in)</b>	0.0346
		<b>Minimum Thickness (in)</b>	0.0329

## 09.22.16 Non Structural Metal Framing

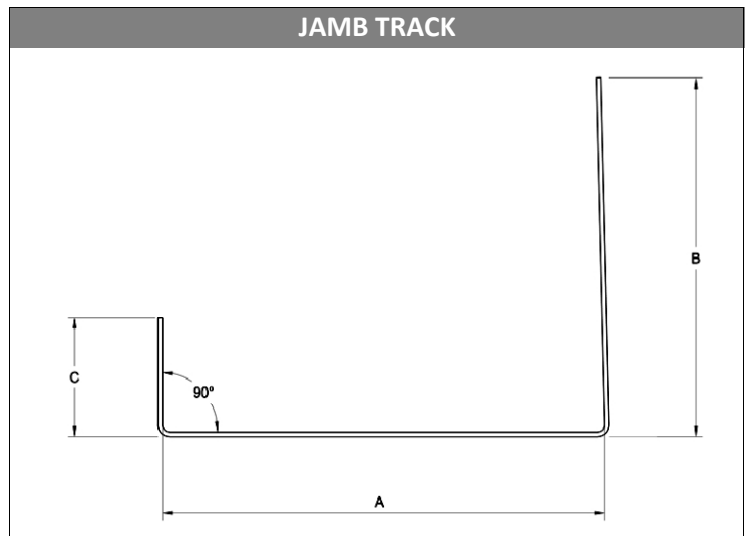

### CODES & STANDARDS

- ASTM C645, E119, E90 & AISI S220 (18 mil - 33 mil)
- Galvanized steel sheet meets ASTM A1003 or A653

### COMMON UL ASSEMBLIES

- U417, U428, U429, U497, U498, U499, V451, V455, V470, V472, V473
- V481, V493, W409, W414, W419, W441, W471, W474, I515, I516

*Note: Always check UL Fire Resistance Directory for complete design requirements*

### GREEN INFO

- LEED v4 credits available
- Contact Technical Services for more information



[www.marinoware.com](http://www.marinoware.com)

For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 11/22/2024  
©Copyright 2024 by Ware Industries, Inc. All rights reserved