

Marino\WARE® Product Submittal Data

PRODUCT NAME: 1000JR200-43

05.40.00 Cold-Formed Metal Joist Framing

MARINO\WARE PART #

PROPERTIES:

A. Web (in)	10"	Yield Strength Fy (KSI)	33
B. Flange (in)	2"	Tensile Strength Fu (KSI)	45
C. Lip (in)	0.75"	Design Thickness (in)	0.0451
Mils	43	Minimum Thickness (in)	0.0423
Available Finish	G60, G90	Gauge	18

SECTION PROPERTIES

GROSS SECTION PROPERTIES

Weight of Member: (lb/ft)	1.84
Cross Sectional Area: A (in ²)	0.404
Moment of Inertia: Ix (in ⁴)	8.51
Section Modulus: Sx (in ³)	1.70
Radius of Gyration: Rx (in)	4.59
Gross Moment of Inertia: Iy (in ⁴)	0.226
Gross Radius of Gyration: Ry (in)	0.749

EFFECTIVE SECTION PROPERTIES

Moment of Inertia-Deflection: Ixe (in ⁴)	8.51
Section Modulus: Sxe (in ³)	1.64
Allowable Bending Moment: Ma (in-k)	30.5
Allowable Shear Force: Va (K)	0.910

TORSIONAL SECTION PROPERTIES



St. Venant Torsional Constant: Jx1000 (in ⁴)	0.274
Torsional Warping Constant: Cw (in ⁶)	6.00
Radius of Gyration on the Centroid Principal axis: Ro (in)	4.95

CODES & STANDARDS

- AISI S100, S240 & ICC ES ESR-1741
- ASTM A 1003, A 653, & C 955
- IBC 2012, 2015, 2018, 2021, 2024
- FBC 2023 & 2022 NYC Building Code

GREEN INFO

- LEED credits available
- Contact Technical Services for more information.

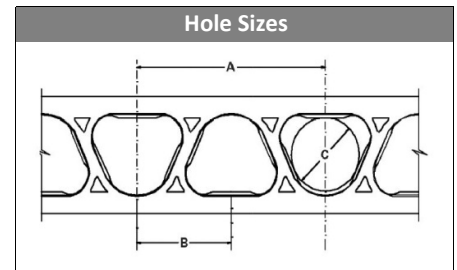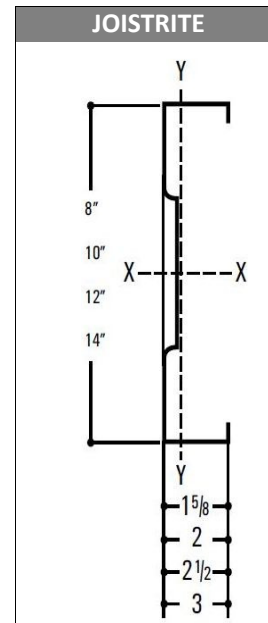

Section	A (in)	B (in)	C
8"	14	7	5.5
10"	28	14	7.2



For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 9/25/2024
©Copyright 2024 by Ware Industries, Inc. All rights reserved

