

Marino\WARE® Product Submittal Data

PRODUCT NAME: 800S200-118

MARINO\WARE PART # 800SJ10

05.40.00 Cold-Formed Metal Framing

PROPERTIES:

A. Web (in)	8"	Yield Strength Fy (KSI)	50
B. Flange (in)	2"	Tensile Strength Fu (KSI)	65
C. Lip (in)	5/8"	Design Thickness (in)	0.1242
Mils	118	Minimum Thickness (in)	0.1180
Available Finish	G60	Gauge	10

SECTION PROPERTIES

GROSS SECTION PROPERTIES

Cross Sectional Area: A (in ²)	1.53
Weight of Member: (lb/ft)	5.209
Moment of Inertia: Ix (in ⁴)	13.319
Section Modulus: Sx (in ³)	3.330
Radius of Gyration: Rx (in)	2.950
Gross Moment of Inertia: Iy (in ⁴)	0.666
Gross Radius of Gyration: Ry (in)	0.659

EFFECTIVE SECTION PROPERTIES

Moment of Inertia-Deflection: Ixe (in ⁴)	13.315
Section Modulus: Sxe (in ³)	3.329
Allowable Local Bending Moment: Mal (in-k)	118*
Allowable Distortional Bending Moment: Mad (in-k)	99.30
Allowable strong axis shear away from punch: Vag (lb)	16235
Allowable strong axis shear at punch: Vanet (lb)	7115

* Allowable Bending Moment includes cold work of forming

TORSIONAL SECTION PROPERTIES



St. Venant Torsional Constant: Jx1000 (in ⁴)	7.872
Torsional Warping Constant: Cw (in ⁶)	8.981
Shear Center to Centroid on Principal X-axis: Xo (in)	-1.188
Shear Center to Mid-Plane of the Web: m (in)	0.764
Radius of Gyration on the Centroid Principal axis: Ro (in)	3.248
Torsional Flexural Constant: β 1-(xo/Ro) ²	0.866

CODES & STANDARDS

- AISI S100, S240 & ICC ES ESR-4062
- ASTM A 1003, A 653, & C 955
- IBC 2012, 2015, 2018, 2021 & FBC 2020, 2023

GREEN INFO

- LEED credits available
- Contact Technical Services for more information.

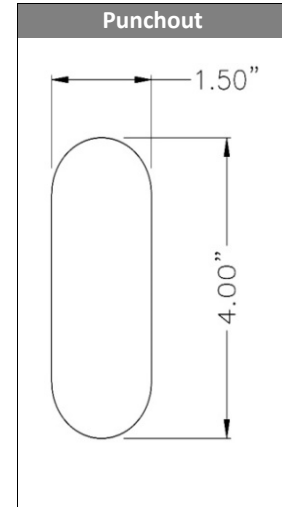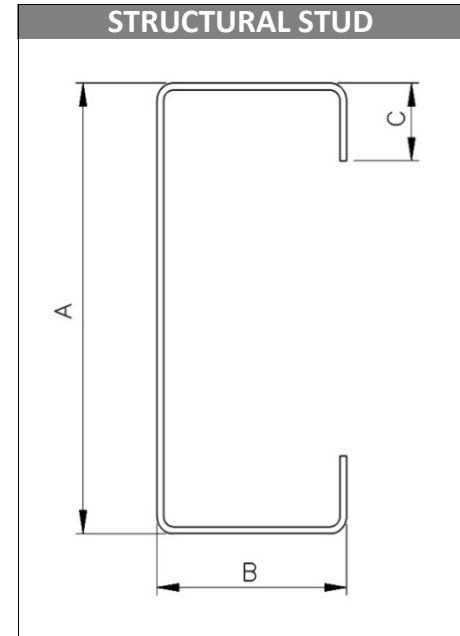

For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 11/5/2023
©Copyright 2023 by Ware Industries, Inc. All rights reserved