

Marino\WARE® Product Submittal Data

PRODUCT NAME: 800S137-33

MARINO\WARE PART # 800SC20

05.40.00 Cold-Formed Metal Framing

PROPERTIES:

A. Web (in)	8"	Yield Strength Fy (KSI)	33
B. Flange (in)	1-3/8"	Tensile Strength Fu (KSI)	45
C. Lip (in)	3/8"	Design Thickness (in)	0.0346
Mils	33	Minimum Thickness (in)	0.0329
Available Finish	G90	Gauge	20

SECTION PROPERTIES

GROSS SECTION PROPERTIES

Cross Sectional Area: A (in ²)	0.388
Weight of Member: (lb/ft)	1.32
Moment of Inertia: Ix (in ⁴)	3.198
Section Modulus: Sx (in ³)	0.799
Radius of Gyration: Rx (in)	2.873
Gross Moment of Inertia: Iy (in ⁴)	0.073
Gross Radius of Gyration: Ry (in)	0.435

EFFECTIVE SECTION PROPERTIES

Moment of Inertia-Deflection: Ixe (in ⁴)	3.00
Section Modulus: Sxe (in ³)	0.62
Allowable Bending Moment: Ma (in-k)	12.30
Allowable strong axis shear away from punch: Vag (lb)	474
Allowable strong axis shear at punch: Vanet (lb)	474

TORSIONAL SECTION PROPERTIES



St. Venant Torsional Constant: Jx1000 (in ⁴)	0.155
Torsional Warping Constant: Cw (in ⁶)	0.957
Shear Center to Centroid on Principal X-axis: Xo (in)	-0.696
Shear Center to Mid-Plane of the Web: m (in)	0.460
Radius of Gyration on the Centroid Principal axis: Ro (in)	2.987
Torsional Flexural Constant: $\beta 1 - (x_0/R_0)^2$	0.946

CODES & STANDARDS

- AISI S100-12 & ICC ES ESR-4062
- Framing meets ASTM A 1003, A 653, & C 955
- Meets IBC 2015 & 2012, FBC 2014, CSSA code compliant

GREEN INFO

- LEED v3 & LEED v4 credits available
- Contact Technical Services for more information.

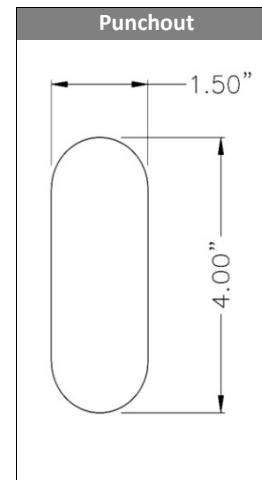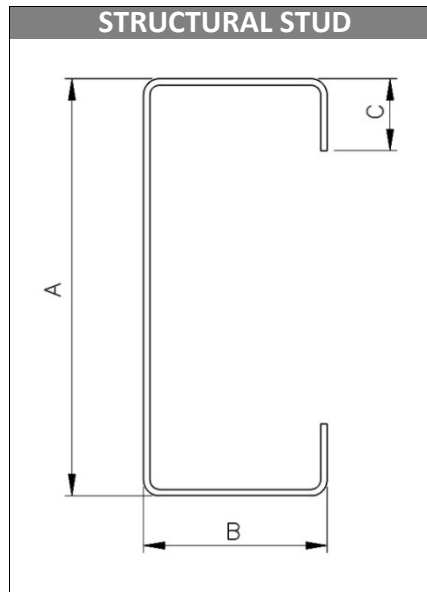

For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 1/5/2017
©Copyright 2017 by Ware Industries, Inc. All rights reserved