

Marino\WARE® Product Submittal Data

PRODUCT NAME: 1400S162-97

MARINO\WARE PART # 140SS12

05.40.00 Cold-Formed Metal Framing

PROPERTIES:

A. Web (in)	14"	Yield Strength Fy (KSI)	50
B. Flange (in)	1-5/8"	Tensile Strength Fu (KSI)	65
C. Lip (in)	1/2"	Design Thickness (in)	0.1017
Mils	97	Minimum Thickness (in)	0.0966
Available Finish	G90	Gauge	12

SECTION PROPERTIES

GROSS SECTION PROPERTIES

Cross Sectional Area: A (in ²)	1.779
Weight of Member: (lb/ft)	6.05
Moment of Inertia: I_x (in ⁴)	40.115
Section Modulus: S_x (in ³)	5.731
Radius of Gyration: R_x (in)	4.748
Gross Moment of Inertia: I_y (in ⁴)	0.340
Gross Radius of Gyration: R_y (in)	0.437

EFFECTIVE SECTION PROPERTIES

Moment of Inertia-Deflection: I_{xe} (in ⁴)	38.90
Section Modulus: S_{xe} (in ³)	4.92
Allowable Bending Moment: M_a (in-k)	147.14
Allowable strong axis shear away from punch: V_{ag} (lb)	6939
Allowable strong axis shear at punch: V_{anet} (lb)	6939

TORSIONAL SECTION PROPERTIES



St. Venant Torsional Constant: J_{x1000} (in ⁴)	6.134
Torsional Warping Constant: C_w (in ⁶)	14.651
Shear Center to Centroid on Principal X-axis: X_o (in)	-0.628
Shear Center to Mid-Plane of the Web: m (in)	0.433
Radius of Gyration on the Centroid Principal axis: R_o (in)	4.810
Torsional Flexural Constant: β [1-(x _o /R _o) ²]	0.983

CODES & STANDARDS

- AISI S100-12 & ICC ES ESR-4062
- Framing meets ASTM A 1003, A 653, & C 955
- Meets IBC 2015 & 2012, FBC 2014, CSSA code compliant

GREEN INFO

- LEED v3 & LEED v4 credits available
- Contact Technical Services for more information.

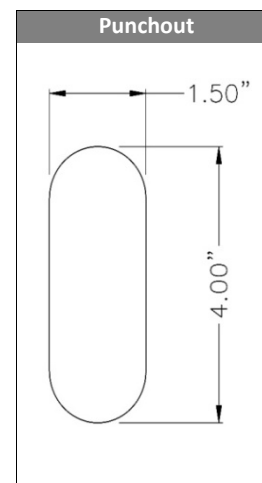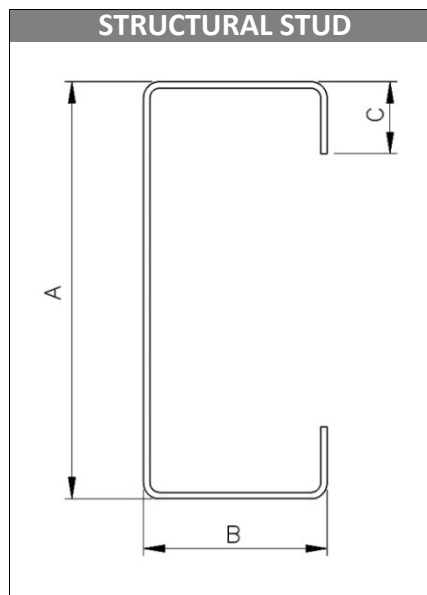

www.marinoware.com

For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 1/5/2017
©Copyright 2017 by Ware Industries, Inc. All rights reserved