

Marino\WARE® Product Submittal Data

PRODUCT NAME: 600SR162-68
MARINO\WARE PART # 600RS14

05.40.00 Cold-Formed Metal Framing

PROPERTIES:

A. Web (in)	6"	Yield Strength Fy (KSI)	50
B. Flange (in)	1.625"	Tensile Strength Fu (KSI)	65
C. Lip (in)	0.50"	Design Thickness (in)	0.0713
Mils	68	Minimum Thickness (in)	0.0677
Available Finish	CP60, CP90	Gauge	14

SECTION PROPERTIES

GROSS SECTION PROPERTIES

Weight of Member: (lb/ft)	1.99
Cross Sectional Area: A (in ²)	0.520
Moment of Inertia: Ix (in ⁴)	3.45
Section Modulus: Sx (in ³)	1.15
Radius of Gyration: Rx (in)	2.58
Gross Moment of Inertia: Iy (in ⁴)	0.177
Gross Radius of Gyration: Ry (in)	0.583

EFFECTIVE SECTION PROPERTIES

Moment of Inertia-Deflection: Ixed (in ⁴)	3.45
Section Modulus: Sxe (in ³)	1.15
Allowable Bending Moment: Ma (in-k)	34.4
Allowable Shear Force: Va (K)	1.21

TORSIONAL SECTION PROPERTIES



St. Venant Torsional Constant: Jx1000 (in ⁴)	0.880
Torsional Warping Constant: Cw (in ⁶)	1.54
Distance From Shear Center To Centroid Principle x-axis x_o (in.)	-1.22
Distance From Shear Center to Mid-Plane of Web m (in.)	0.691
Radius of Gyration on the Centroid Principal axis: r_o (in.)	2.91
$1 - (x_o/r_o)^2 = \beta$	0.825
Critical Unbraced Length, lateral torsional buckling excluded L_u (in.)	31

CODES & STANDARDS

- Meets ASTM A 1003, A 653, C955 & AISI S240
- Coating meets ASTM C 955 / AISI S240
- Meets IBC 2021, 2018
- IAPMO ES ER-0781

GREEN INFO

- LEED v4 credits available
- Contact Technical Services for more information

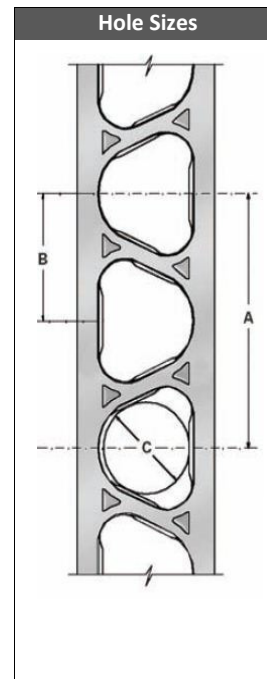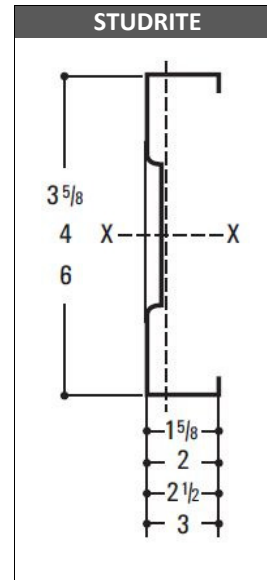

Section	A (in)	B (in)	C
3-5/8"	7.0	3.5	1-3/4
4"	7.0	3.5	1-3/4
6"	8.1	4.0	2-7/8



For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 7/1/2021
 ©Copyright 2021 by Ware Industries, Inc. All rights reserved