

Marino\WARE® Product Submittal Data

PRODUCT NAME: 600VT300-33

MARINO\WARE PART # 600VT333

PROPERTIES:

A. Web (in)	6	Yield Strength Fy (KSI)	33
B. Leg (in)	3	Design Thickness (in)	0.0346
Mils	33	Minimum Thickness (in)	0.0329
Finish	CP60	Gauge	20 STR

SECTION PROPERTIES

GROSS SECTION PROPERTIES

Weight of Member: (lb/ft)	1.410
Cross Sectional Area: A (in²)	0.416
Moment of Inertia: Ix (in⁴)	2.580
Section Modulus about the X-axis: Sx (in³)	0.836
Radius of Gyration: Rx (in)	2.490
Gross Moment of Inertia: Iy (in⁴)	0.384
Section Modulus about the Y-axis: Sy (in³)	0.171
Gross Radius of Gyration: Ry (in)	0.961

EFFECTIVE SECTION PROPERTIES

Moment of Inertia-Deflection: Ixd (in⁴)	1.640
Section Modulus: Sxe (in³)	0.334
Allowable Moment: Ma (in-k)	6.600

TORSIONAL PROPERTIES

Shear Center to Centroid on Principal X-axis: Xo (in)	-1.850
St. Venant Torsional Constant: Jx10³ (in⁴)	0.1660
Torsional Warping Constant: Cw (in⁶)	2.540
Radius of Gyration on the Centroid Principal axis: Ro (in)	3.250
Torsional Flexural Constant: β=1-(xo/Ro)²	0.675

CODES & STANDARDS


- Meets IBC 2015, 2018 & FBC 2017
- Meets or tested to: ASTM C 645, C 754, E 90, E 119 & AISI S220
- Steel sheet meets ASTM A 1003 & A 653
- Third Party Code Evaluation Report: CCRR-0154
- Multiple Fire Rated Assemblies

GREEN INFO

- LEED v3 & LEED v4 credits available
- Contact Technical Services for more information



09.22.16 Non-Structural Metal Stud

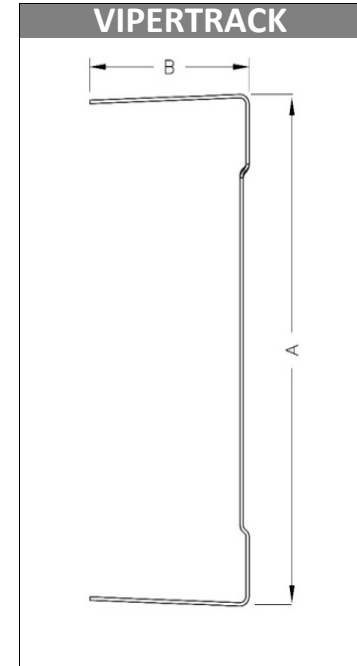

www.marinoware.com

For more information, please contact Marino\WARE Technical Services at 866-545-1545

This technical information reflects the most current information available and supersedes any and all publications, effective 11/30/19.

©Copyright 2019 by Ware Industries, Inc. All rights reserved