


USG FISSURED™ BASIC ACOUSTICAL PANELS



USG Fissured™ Basic Acoustical
Panels/USG Donn® Brand DX®
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

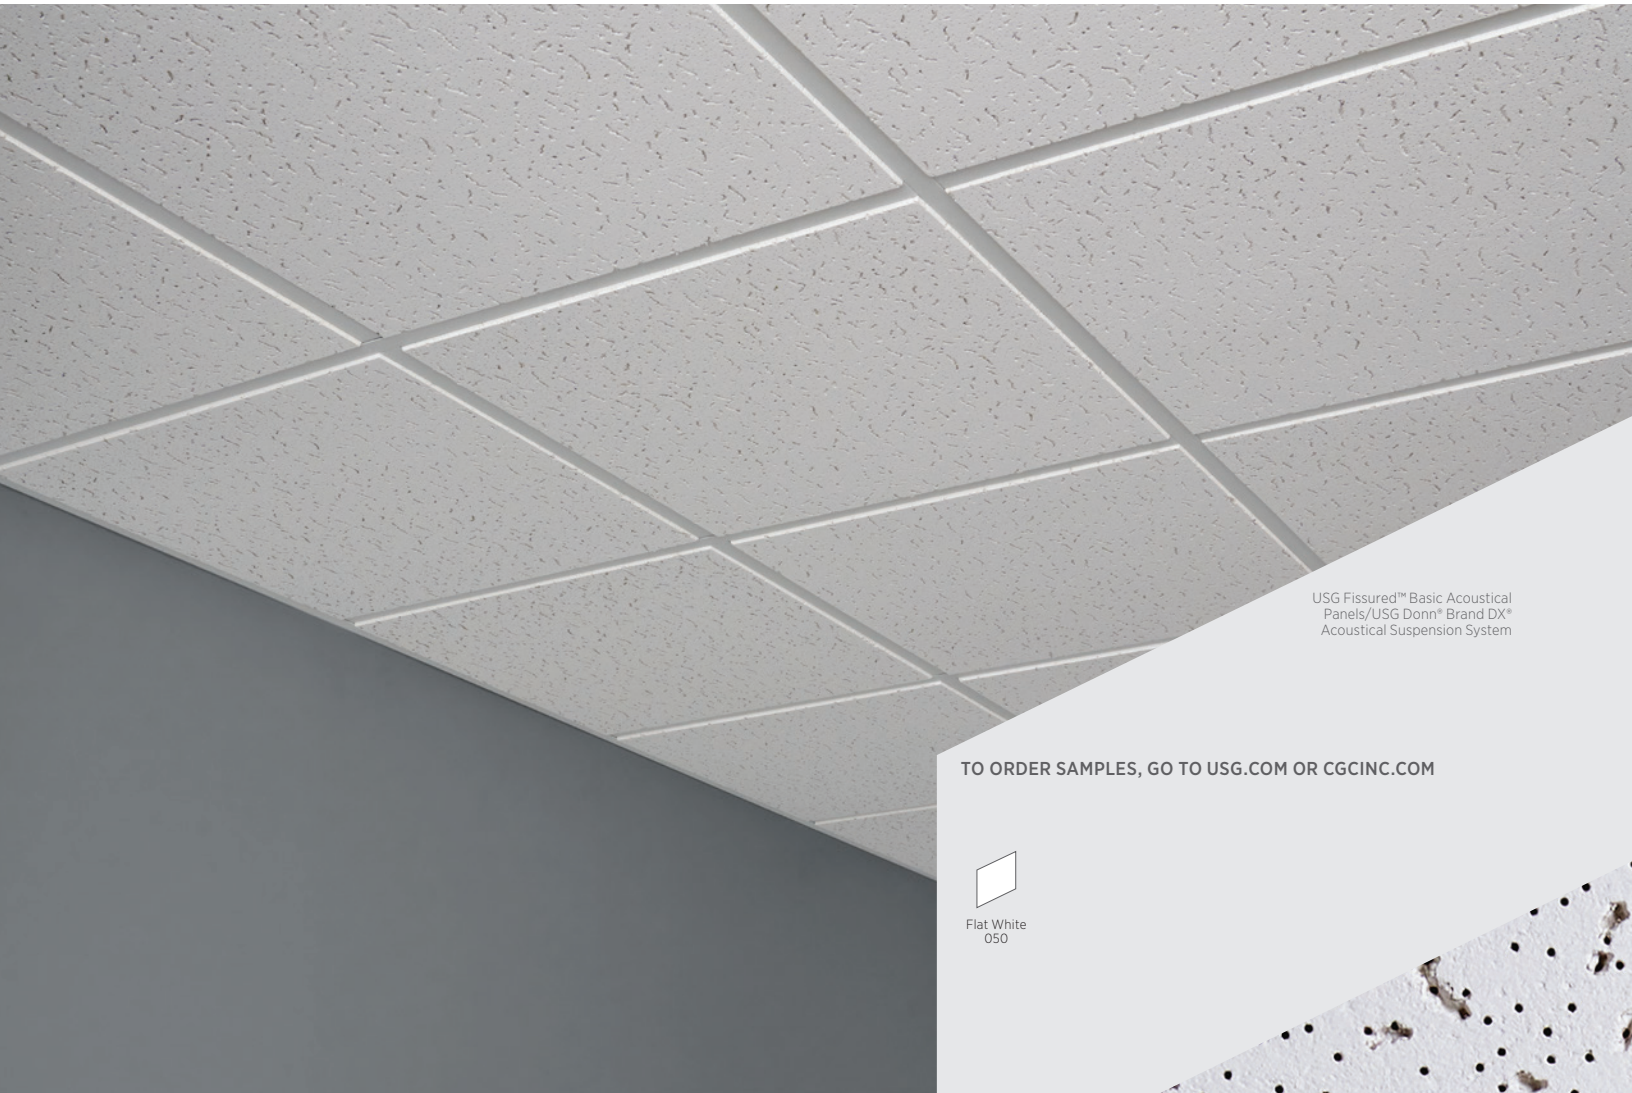

Flat White
050

FEATURES AND BENEFITS

- Economical, all-purpose ceiling pattern available in various panel sizes.
- Optional Firecode® product designed to meet life-safety codes.

APPLICATIONS

- Administrative offices
- Corridors
- Mass merchandisers
- Convenience stores

SUBSTRATE

- Wet-formed mineral fiber

Medium-Textured Panel



USG FISSURED™ BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
 USG: usg.com or samplitt@usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
 usgdesignstudio.com
 cgcdesignstudio.com



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL/COM/GG UL 2818



HIGH RECYCLED CONTENT



Edge	Panel Size	Fire Rating ^{2,5}	Item No.	NRC	CAC Min.	LR ³	Color	Grid Options	VOC Emissions	Recycled Content ¹	Panel Cost
	2'x2'x5/8"		560	0.55	33	0.81	White	A,C,D	Low	24-25%	\$
	2'x2'x5/8"		585	0.55	35	0.81	White	B,E	Low	48-49%	\$
	2'x4'x5/8"	Class A	562	0.55	35	0.81	White	A,C	Low	24-25%	\$
	2'x4'x5/8"		586	0.55	35	0.81	White	B	Low	48-49%	\$
	2'x2'x5/8"	Class A	506	0.55	33	0.81	White	F	Low	24-25%	\$
	2'x4'x5/8"	Class A	507	0.55	35	0.81	White	F	Low	24-25%	\$

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at spot.ul.com.

High Recycled Content

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



GRID PROFILE OPTIONS

A USG DX*	B USG DXL™	C USG DXW™	D ⁴ USG Centricitee™ DXT™	E ⁴ USG Centricitee™ DXLT™	F USG DX*

PHYSICAL DATA/ FOOTNOTES

Product literature
 Data sheet: SC1815

ASTM E1264 classification
 ASTM E1264-22 Type III, Form 2, Pattern C & D
 ASTM E1264-23 Type A, Form A1.2, Pattern C & D

ASTM E84 and CAN/ULC S102 surface-burning characteristics
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

UL Type
 FR-2
 FR-83

Online tools
 usgdesignstudio.com or cgcdesignstudio.com

Weight
 0.62-0.64 lb./sq. ft. (Class A)
 1.09-1.11 lb./sq. ft. (Firecode*)

Thermal resistance
 R-1.4 (Class A)
 R-1.6 (Firecode*)

Maximum backloading
 See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance
 Can be cleaned easily with a soft brush or vacuum.

Metric sizes available
 Contact sales for minimum quantities and lead times.

- Notes**
- For details, see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
 - Firecode® products are approved for use in fire-resistance rated UL designs, where the designs allow for the UL Type Designation.
 - LR values are shown as averages.
 - Maximum 2'x2' with SQ edge panels.
 - It is not recommended to mix Firecode™ with Class A panels in the same ceiling plane.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1815/rev. 3-24
 © 2024 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXL, DXLT, DXT, DXW, FIRECODE, FISSURED, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

